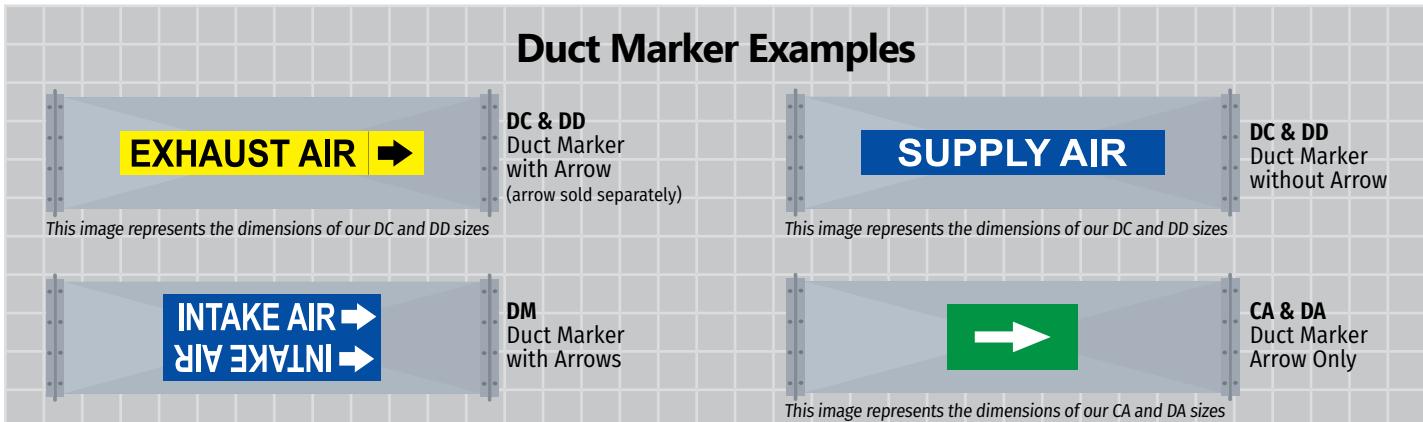


Duct Markers clearly mark duct systems, indicating system identification, color coding and directional flow. Duct Markers provide improved visual identification over stenciling.


Marker and Letter Size References

Kolbi Style	Marker Size		Letter Size	
DC	2" x 14"	(50.8mm x 355.6mm)	1-1/4"	(31.75mm)
DD	3" x 24"	(76.2mm x 609.6mm)	2-1/2"	(63.5mm)
DM	4" x 10"	(101.6mm x 254mm)	1-1/4"	(31.75mm)
CA (Individual Arrow)	2" x 4-1/2"	(50.8mm x 114.3mm)	1-1/4"	(31.75mm)
DA (Individual Arrow)	3" x 6"	(76.2mm x 152.4mm)	2-1/2"	(63.5mm)

Duct Marker Legends and Colors

→	OUTSIDE AIR
→	RELIEF AIR
→	RETURN AIR
EXHAUST AIR	RETURN AIR
INTAKE AIR	SUPPLY AIR
LAB AIR	SUPPLY AIR

Standards Met	ANSI/ASME A13.1-2015 Scheme for Identification of Piping Systems ANSI Z535.1 Safety Color Code		
Installation Instructions	Applied to a clean dry surface above 32°F (0°C)		
Service Temp	-40°F to 176°F (-40°C to 82.22°C)		
Water Resistance	Good, Product has passed submersion tests		
Finish	High Gloss		
Material Properties	4 Mil vinyl with pressure sensitive adhesive backing		
Adhesive Properties	Aggressive permanent acrylic adhesive		
	Stainless Steel: 54 oz/in (594 N/m)		Acrylic: 56 oz/in (616 N/m)
	Glass: 53 oz/in (599 N/m)		Polypropylene: 51 oz/in (561 N/m)
	Expected Shear: 5 hours		Tack: gm (740)
Ink Properties	Inks resistant to fading with UV exposure, Semi-Gloss Finish		
Storage Stability	2 years stored at 70°F (21°C) and 50% RH		
Outdoor Durability	4 to 6 years		
Abrasion Resistance	Good		
Chemical Resistance	Resistant to Acids, Alkalies and Salts		
Equivalent To	Brady Duct Markers, Brimar Duct Markers, Seton Code Duct Markers, MS-900 Self-adhesive Duct Markers		

DATE	/	/	JOB
MM	DD	YYYY	
CONTRACTOR NAME			