KOLBI Pipe Marker Co.

PRODUCT SPECIFICATION SHEET

Engraved Plastic Valve Tags

Product Specifications

Engraved Plastic Valve Tags are the most versatile tags available. Multiple color options are available for easy recognition. Engraving allows for variation in font size and style, along with an increased number of characters. Available in five material options: Standard 1/16"indoor, 1/8" indoor, 1/8" outdoor, 1/8" double-sided, and 1/16"phenolic.

Engraved Plastic Valve Tag Examples

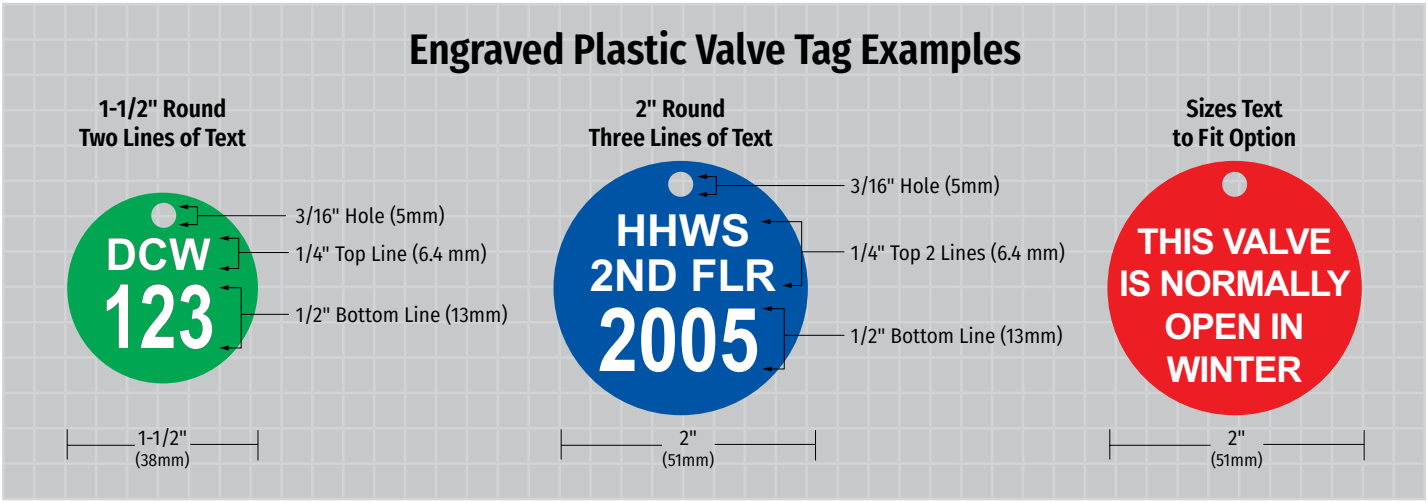

Tag Sizes	Top Line	Middle Line	Bottom Line
○ 1-1/2" Round	○ 1/4" (5 Characters)	○ N/A	○ 1/2" (3 Characters)
○ 1-1/2" Square	○ 1/4" (5 Characters)	○ N/A	○ 1/2" (3 Characters)
○ 2" Round	○ 1/4" (6 Characters)	○ 1/4" (8 Characters)	○ 1/2" (4 Characters)
○ 2" Square	○ 1/4" (6 Characters)	○ 1/4" (8 Characters)	○ 1/2" (4 Characters)
○ 2" Octagon	○ 1/4" (6 Characters)	○ 1/4" (8 Characters)	○ 1/2" (4 Characters)

*Size text to fit option available

Accessories
☐ No. 6 Brass Beaded Chain
☐ No. 16 Brass Jack Chain
☐ Brass S Hooks
☐ Zinc Hooks
☐ Nylon Ties

*For other options refer to the Accessories Spec Sheet

Colors
☐ WHITE/BLACK
☐ BLACK/WHITE
☐ WHITE/RED
☐ WHITE/BLUE
☐ BLACK/ORANGE
☐ WHITE/GREEN
☐ RED/WHITE
☐ WHITE/GREY
☐ BLACK/YELLOW

Physical Properties

INSTALLATION INSTRUCTIONS	For adhesive backing applied to a clean dry surface above 50°F (10°C)
SERVICE TEMP	-40°F to 200°F (-40°C to 93°C)
WATER RESISTANCE	Good
FINISH	Matte
MATERIAL PROPERTIES	Impact Acrylic
MATERIAL OPTIONS	1/16"(1.6mm), 1/8"(3mm) , 3PLY (DOUBLE SIDED)
UV RESISTANT OPTION:	UV Resistant option available for some colors
INSTALLATION OPTIONS	Adhesive backing, Holes and Adheisve Backing, Magnetic backing
STORAGE STABILITY	Indefinite when stored at 70°F (21°C) and 50% RH
OUTDOOR DURABILITY	4 - 6 Years (UV Resistant Material 15+ years)
CHEMICAL RESISTANCE:	Resistant to Acids, Alkalis and Salts
EQUIVALENT TO:	Seton Setonflex, Brimar Briply, Marking Services Inc. MS-264

Project

DATE ____/____/____ (MM / DD / YYYY) JOB _____

CONTRACTOR NAME _____