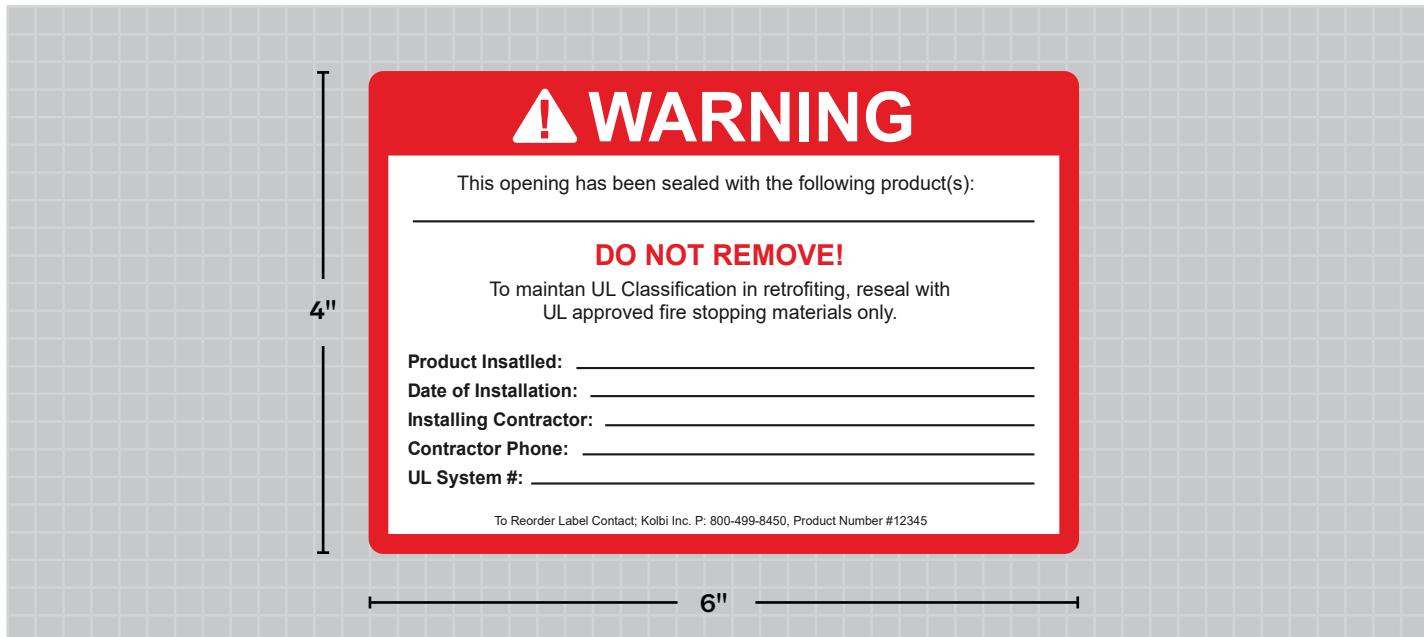


Reflective Firestop labels identify where firestop materials have been applied, prevent the improper removal of the material, or to inform maintenance crews about the proper firestop material necessary for replacement. You can either order our Standard Firestop Labels and fill in the required fields, or for a more professional look, you can order the labels with your specific information preprinted on the label. Please contact us for your custom label requirements.

**Sizing**

Overall Dimensions

4" High x 6" Wide

Installation Instructions	Applied to a clean dry surface above 32°F (0°C)
Service Temp	-40°F to 176°F (-40°C to 80°C)
Water Resistance	Good, Product has passed submersion tests
Finish	High Gloss, Engineer Grade Reflective
Material Properties	6 Mil vinyl with pressure sensitive adhesive backing
Adhesive Properties	Aggressive permanent acrylic adhesive
	Stainless Steel 54 oz/in (594 N/m), Acrylic 56 oz/in (616 N/m)
	Glass 53 oz/in (599 N/m), Polypropylene 51 oz/in (561 N/m) Expected Shear: 5 hours, Tack gm (740)
Ink Properties	Inks resistant to fading with UV exposure, Semi-Gloss Finish
Storage Stability	2 years stored at 70°F (21°C) and 50% RH
Outdoor Durability	4 to 6 years
Abrasion Resistance	Good
Chemical Resistance	Resistant to Acids, Alkalies and Salts
Equivalent To	3M Firestopping label, Hiliti Firestopping Label

DATE	/	MM	/	DD	/	YYYY	JOB
CONTRACTOR NAME _____							