
KOLBI PIPE MARKER CO.

PRODUCT SPECIFICATION SHEET

Engraved Phenolic Nameplates

Product Specifications

Phenolic Nameplates are ideal for jobs that require electrical equipment and panels to be permenantly identified. Phenolic nameplates are fire-retardent, electrically non-conductive and UL 94 VO rated. Our pheonlic nameplates come in all the same plate sizes and text size options as our standard engraved plastic and metal nameplates.

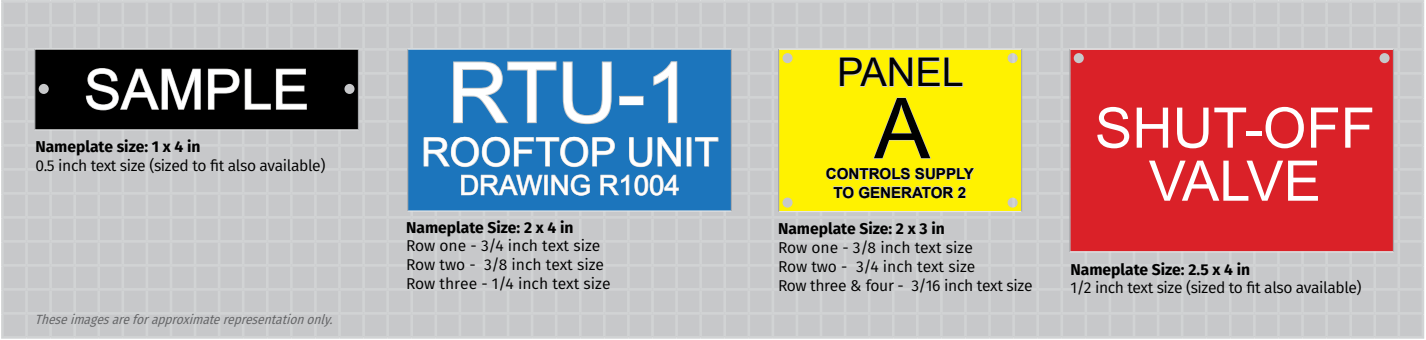

Nameplate size: 1 x 4 in
0.5 inch text size (sized to fit also available)

Nameplate Size: 2 x 4 in
Row one - 3/4 inch text size
Row two - 3/8 inch text size
Row three - 1/4 inch text size

Nameplate Size: 2 x 3 in
Row one - 3/8 inch text size
Row two - 3/4 inch text size
Row three & four - 3/16 inch text size

Nameplate Size: 2.5 x 4 in
1/2 inch text size (sized to fit also available)

These images are for approximate representation only.

Nameplate Sizes

☐	3/4 x 2-1/2 in (19 x 64 mm)	☐	3 x 5 in (76 x 127 mm)
☐	1 x 2 in (25 x 51 mm)	☐	3 x 6 in (76 x 152 mm)
☐	1 x 3 in (25 x 76 mm)	☐	4 x 6 in (102 x 152 mm)
☐	1 x 4 in (35 x 102 mm)	☐	4 x 8 in (102 x 203.2 mm)
☐	1-1/2 x 4 in (38 x 102 mm)	☐	4 x 12 in (102 x 304.8 mm)
☐	2 x 3 in (51 x 76 mm)	☐	6 x 12 in (152 x 304.8 mm)
☐	2 x 4 in (51 x 102 mm)	☐	8 x 12 in (203.2 x 304.8 mm)
☐	2-1/2 x 4 in (64 x 102 mm)	☐	12 x 12 in (304.8 x 304.8 mm)
☐	2 x 6 in (51 x 152 mm)	☐	12 x 18 in (304.8 x 457.2 mm)
☐	3 x 4 in (76 x 102 mm)	☐	Custom Size Required

Colors

☐	WHITE/BLACK
☐	BLACK/WHITE
☐	RED/WHITE
☐	WHITE/RED
☐	BLUE/WHITE
☐	WHITE/BLUE
☐	WHITE/ORANGE
☐	WHITE/GREEN
☐	YELLOW/BLACK
☐	BLACK/YELLOW

Text Sizes

Text Sizes	Number of Lines 1	2	3	4
Sized to fit nameplate	☐	☐	☐	☐
3/16 in (4.7625 mm)	☐	☐	☐	☐
1/4 in (6.35 mm)	☐	☐	☐	☐
3/8 in (9.525 mm)	☐	☐	☐	☐
1/2 in (12.7 mm)	☐	☐	☐	☐
3/4 in (19.05 mm)	☐	☐	☐	☐
1 in (25.4 mm)	☐	☐	☐	☐
Other	☐	☐	☐	☐

Materials

☐	1/16" 2-ply Plastic
☐	1/8" 2-ply Plastic
☐	1/8" Outdoor Grade Plastic
☐	1/8" 3-ply Material
☐	1/16" Phenolic Material

Mounting Options

☐	Corner Holes	
☐	Holes Centered Left & Right	
☐	Top Corner Holes	
☐	Holes Centered Top & Bottom	
☐	Adhesive Backing	May combine with any option above

Physical Properties

Installation Instructions	For adhesive backing applied to a clean dry surface above 50°f (10°c)
Service Temp	20° F through 175° F (29° C through 79° C)
Water Resistance	Good
Finish	Matte
Material Properties	Laminated Rigid Plastic
Material options	1/16"(1.6mm), 1/8" Available upon request
Installation Options	Adhesive backing, Holes and Adheisve Backing, Magnetic backing
Hole Options	One hole each side centered, holes in corners, holes in top corners
Adhesive Properties	4-mil Acrylic Adhesive, Adhesive Rated from -40° F to 175° F (-40° C to 79.45° C)
Storage Stability	Indefinite when stored at 70° F (21° C) and 50% RH
Outdoor Durability	4 - 6 Years
Chemical Resistance	Resistant to acids, alkalis and salts
Equivalent To	Seton Setonflex, Brimar Briply Phenolic, Marking Services Inc. MS-264, Brady Engraved Phenolic Nameplates

Project

DATE _____ / _____ / _____ JOB _____
MM DD YYYY

CONTRACTOR NAME _____